


RUBBER FLEXIBLE JOINT - THREADED PN16 FIG. FRJ 510

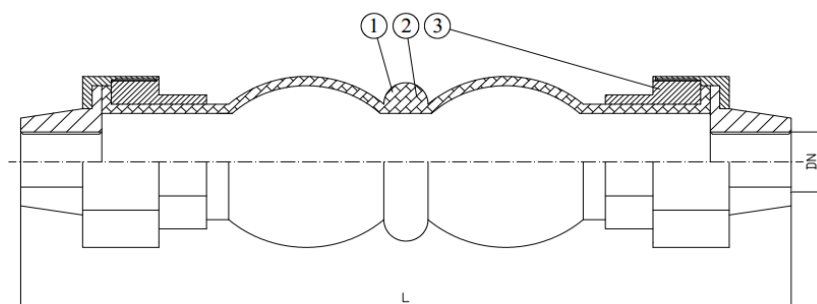

MATERIALS OF MAIN PARTS

No	PARTS	MATERIALS
1	Body	EPDM
2	REINFORCE	NYLON
3	UNION	DUCTILE IRON ZINC PLATED

MAIN FEATURES

Angle of Deflection	15°
Bursting Pressure(Mpa)	4.8
Applicable Temp	-15~115°C

DIMENSIONS

Dim (Inch)	DN	L	Axial displacement		Lateral displacement
			Stretch	Compression	
1/2	15	180	5~6	22	22
3/4	20	180	5~6	22	22
1	25	180	5~6	22	22
1 1/4	32	200	5~6	22	22
1 1/2	40	210	5~6	22	22
2	50	220	5~6	22	22
2 1/2	65	245	5~6	22	22