


Y-Strainer PN16 (DIN 3202 F1) FIG. ST 200

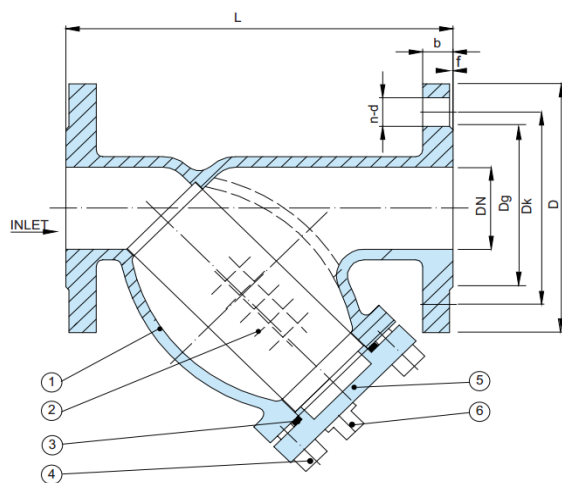

MAIN FEATURES

FACE TO FACE	DIN 3202	
FLANGES	EN 1092-2	
TESTS	EN 12266-1	
WORKING TEMPERATURE	-10°C + 120°C	
WORKING PRESSURE	16bar	
TESTING PRESSURE	SHELL TEST	24bar
	SEALING TEST	17.6bar

DIMENSIONS

DN	L	Dg	DK	D	n-d	H
50	230	99	125	165	4-19	153
65	290	118	145	185	4-19	183
80	310	132	160	200	8-19	219
100	350	156	180	220	8-19	238
125	400	184	210	250	8-19	279
150	480	211	240	285	8-23	315
200	600	266	295	340	12-23	400
250	730	319	355	405	12-28	482
300	850	370	410	460	12-28	565

MATERIALS OF MAIN PARTS

No	PARTS	MATERIALS
1	Body	Cast Iron/Ductile Iron GJL-250/EN GJS 500-7
2	Screen	Stainless Steel 304
3	Gasket	Graphite
4	Bolts	Steel
5	Cover	Ductile Iron EN GJS 500-7
6	Plug	Stainless Steel

SPECIFICATION:

Strainers are supplied with a stainless steel perforated strainer element. The screen diameter hole sizes are as: DN50 - DN300 1.5mm diameter.